



OASIS | ONE


OASIS|ONE



---

SLIM REMOTE CONTROL UNIT

# OASIS | ONE

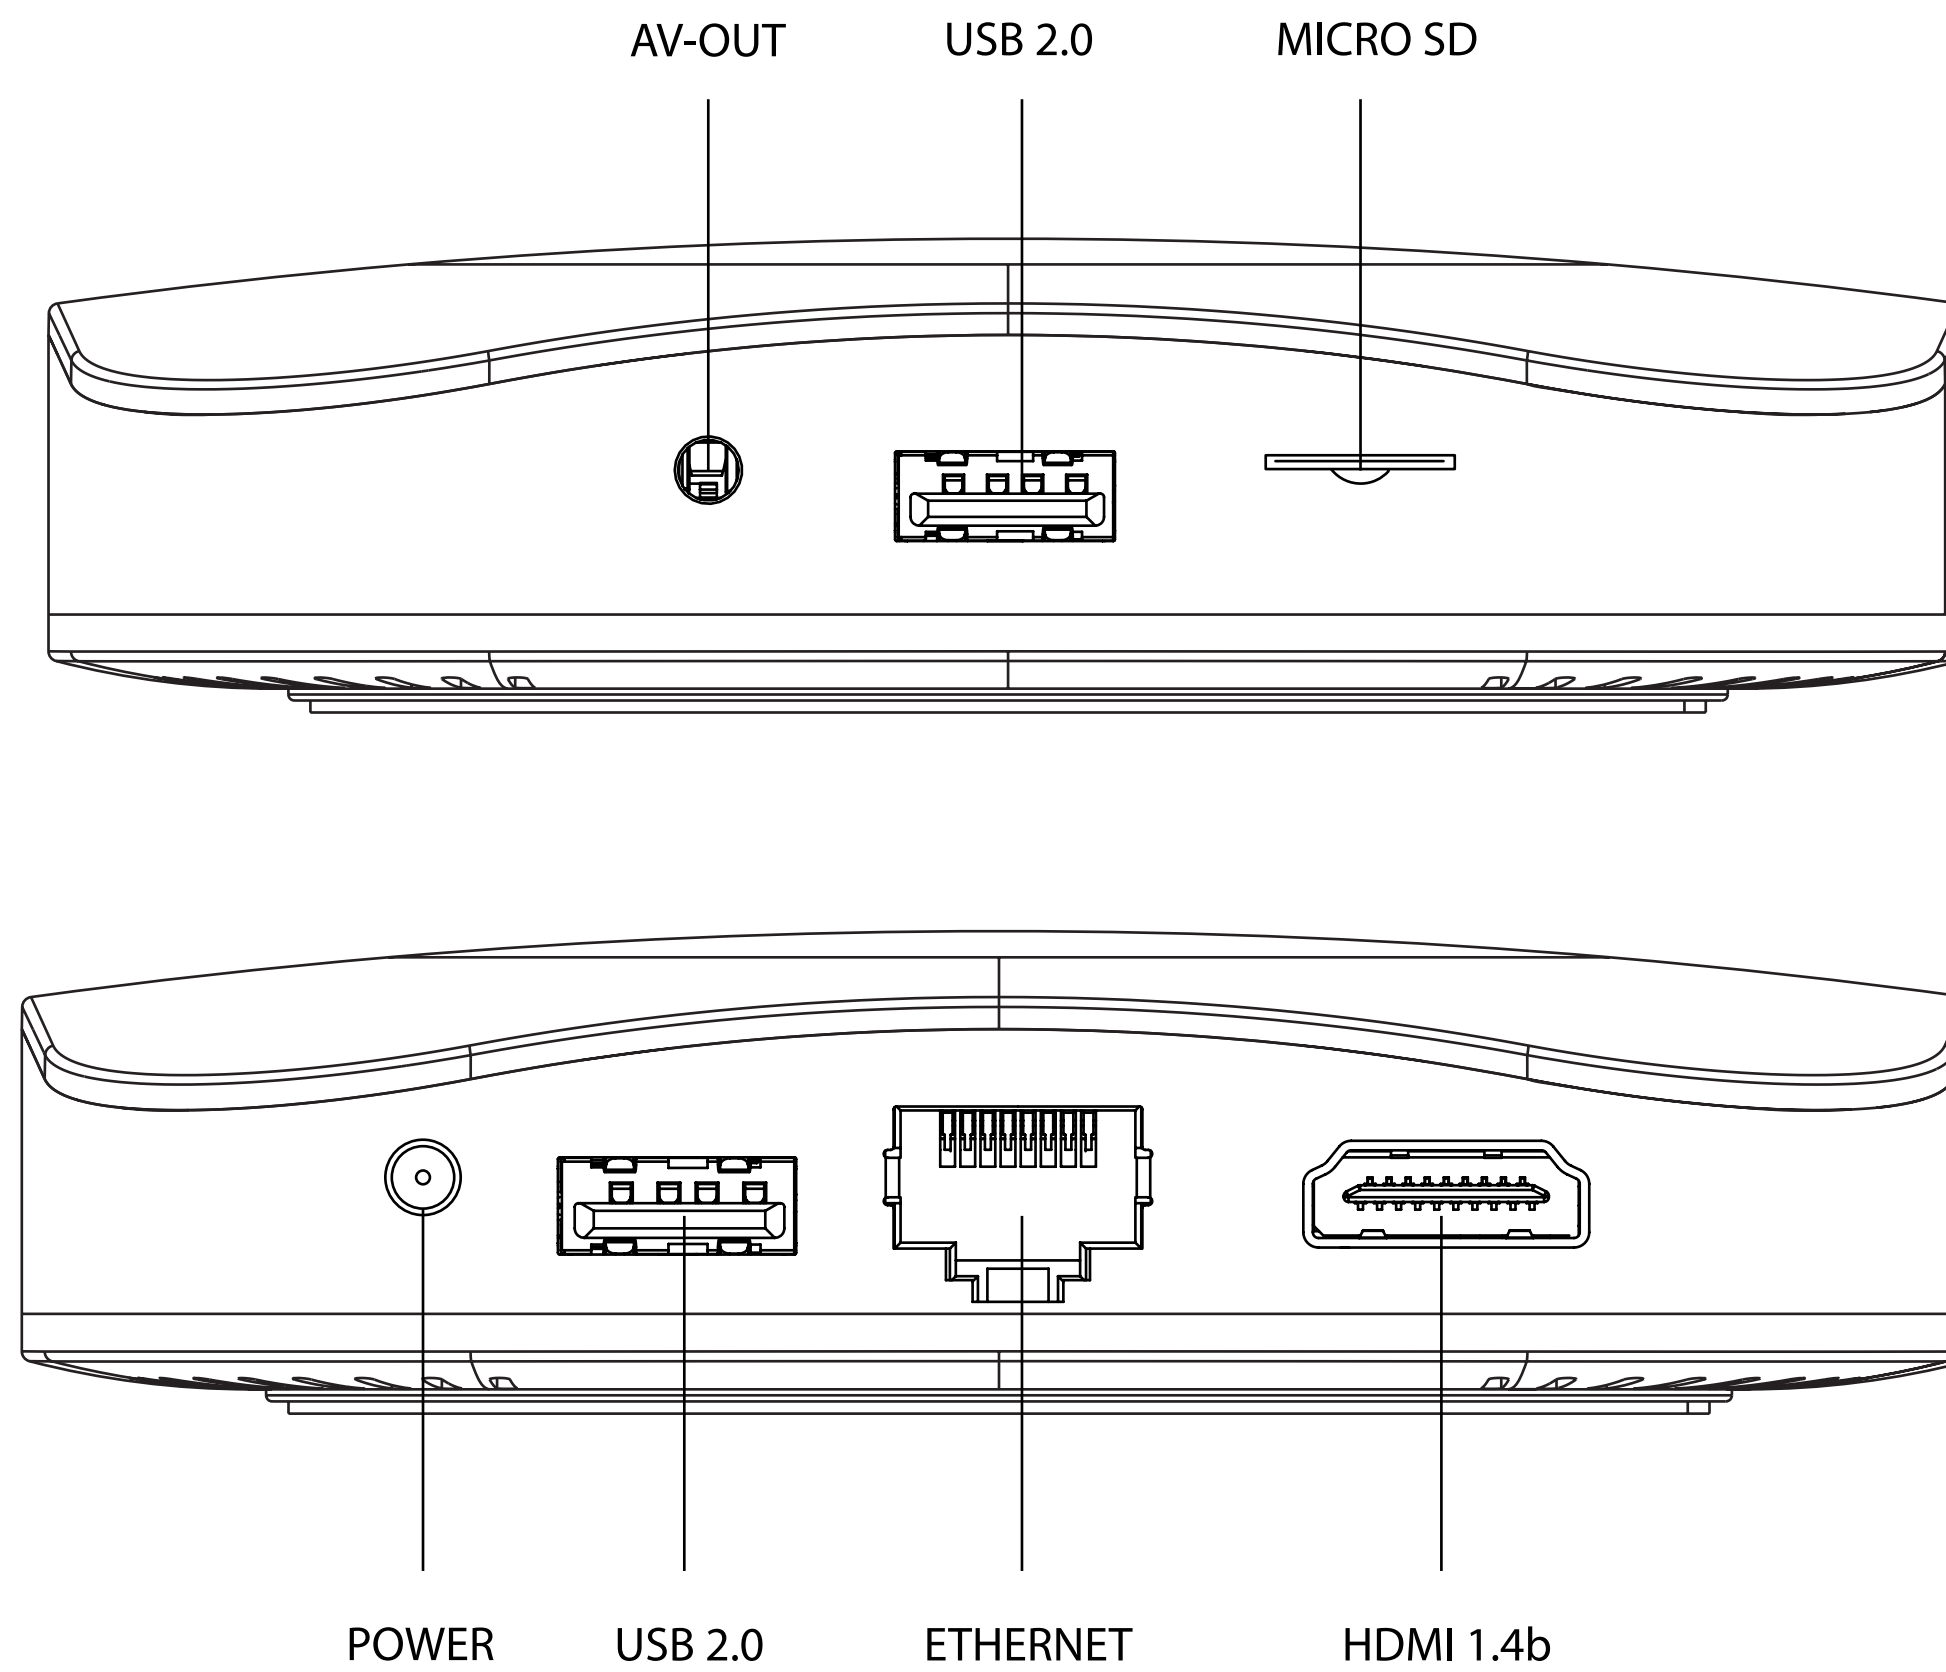

---

## DEVICE CONNECTIVITY

# OASIS | ONE

## SPECIFICATIONS

<b>Model</b>	OASIS One
<b>CPU</b>	Amlogic S805 Quad core up to 1,5GHz (DVFS)
<b>GPU</b>	ARM Mali 450 Quad Core up to 600MHz+ (DVFS)
<b>RAM</b>	1GB DDR3
<b>FLASH</b>	8GB eMMC
<b>DRM</b>	Widewine
<b>Copy protection</b>	HDCP
<b>Digital outputs</b>	HDMI 1.4b
<b>Analog outputs</b>	Composite video and stereo audio
<b>RCU</b>	IR, Bluetooth (optional)
<b>USB</b>	2xUSB 2.0
<b>Audio Codecs</b>	MP3, AAC, WMA, RM, FLAC, Ogg /Vorbis
<b>Sound Channels</b>	Mono, Left, Right, Stereo
<b>Video Codecs</b>	H.265 HEVC MP@L4.1 up to 1080P@60fps, H.264 AVC HP@L4.2 up to 1080P@60fps, H.264 MVC up to 1080P@60fps, MPEG-4 ASP@L5 up to 1080P@60fps, WMV/VC-1 SP/MP/AP up to 1080P@60fps, AVS JiZhun Profile up to 1080P@60fps, MPEG-2 MP/HL up to 1080P@60fps, MPEG-1 MP/HL up to 1080P@60fps, RealVideo 8/9/10 up to 1080P, WebM
<b>Video Standard</b>	PAL/NTSC
<b>Streaming protocols</b>	HLS, DASH, MSS, HTTP TS, UDP(IGMP), RTSP, RTMP
<b>Security Algorithms</b>	AES, 1DES, 3DES, CPRM, CPPM, CSS, DTCP
<b>Ethernet</b>	10/100
<b>Wi-Fi</b>	b/g/n 2,4Ghz with Bluetooth 4.0 (optional)
<b>Interfaces</b>	2xUSB 2.0
<b>OS</b>	Android 4.4.2 (AOSP)
<b>Power supply</b>	230V in, 5V 2A out
<b>Working Temperature</b>	0°C to 45°C
<b>Storage Temperature</b>	-40°C to +70°C